


A1088
A1688

**HIGH DEFINITION,
STABLE AND
RELIABLE**

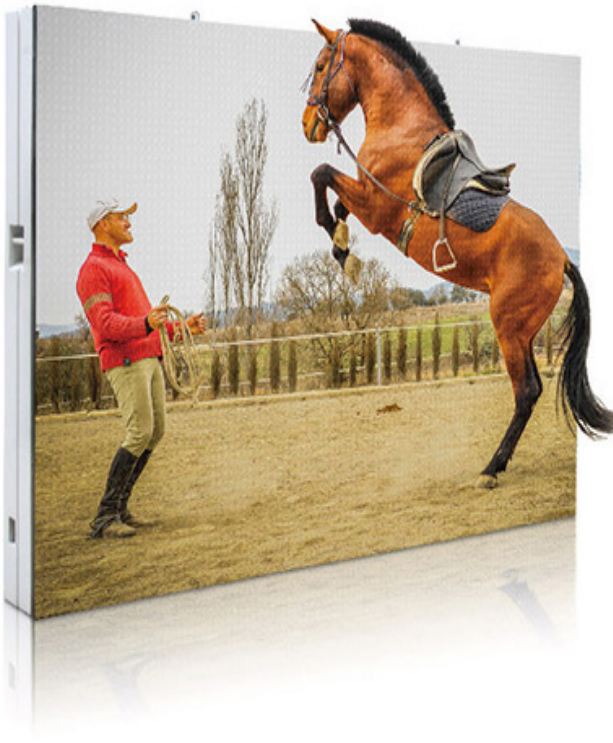

Specifications

Model	A1688
Pixel pitch	16 (mm)
Brightness	12000 nit
Panel dimensions (W×H×D)	1536×1024×180 (mm)
Panel dimensions (W×H×D)	60.47×40.31×7.09 (Inch)
Panel material	Steel
Weight	82 (kg)
Weight	180.8 lbs
Pixel configuration	1R1G1B
Module dimensions (W×H)	256×256 (mm)
Module dimensions (W×H)	10.08×10.08 (Inch)
Pixel matrix per panel	96×64 pixels
Pixel density	3906 pixels/sq.m.
Refresh rate	≥3000 Hz
Gray scale per color	8192 level
Colors	549 Billion
Viewing angle (H/V)	120/60 (deg)
IP rating (Front/Rear)	IP65/IP54
Power consumption (max/avg)	1150/380 (W/sq.m.)
Input voltage (AC)	110V ~ 240V
Operating temperature	-20°C ~+ 50°C
Operating humidity	10% ~ 90%
Source compatibility (with video processor)	AV, S-Video, VGA, DVI, HDMI, SDI, DP