


A3



HIGH DEFINITION LED DISPLAY



Specifications

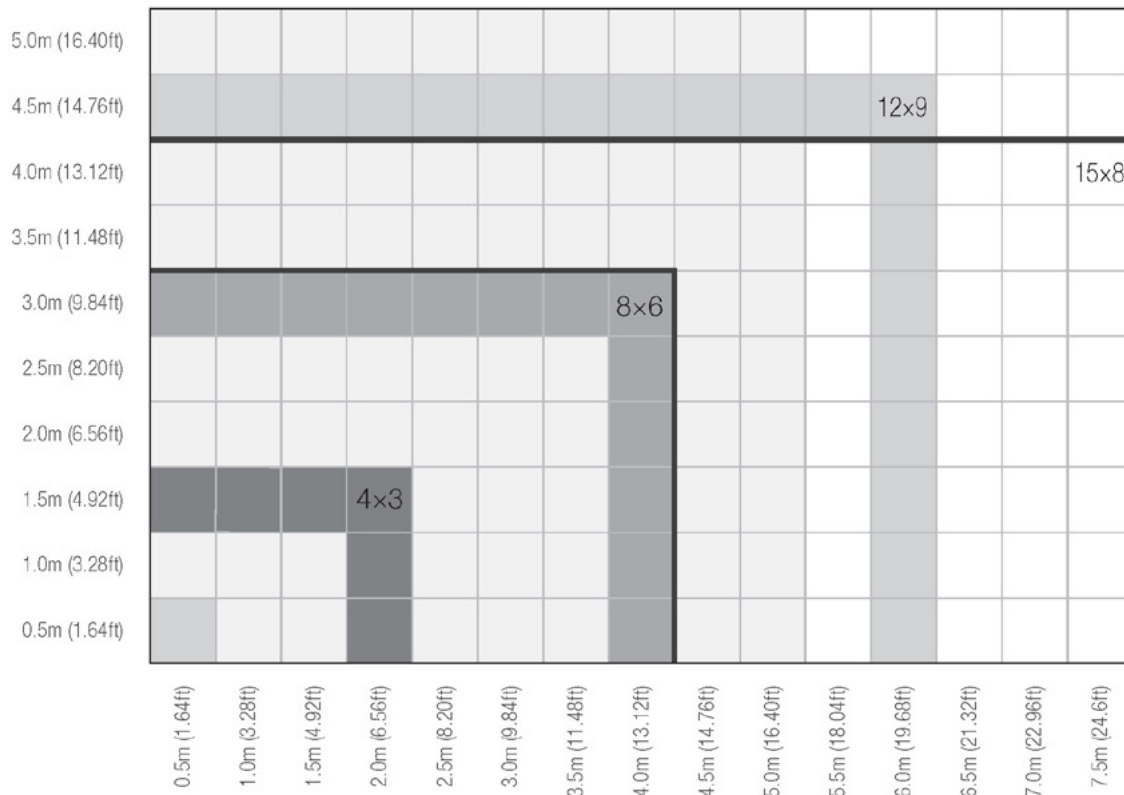

Specifications

Pixel pitch	3.9 mm	Power consumption (max/avg)	540/180 w/sq.m.
Pixel configuration	SMD 3 in 1	Panel size (WxHxD)	500x500x96 mm
Brightness	≥1200 nits	Panel weight	10 kg
Refresh rate	≥2000 Hz	Panel material	Aluminum
Gray scale	65536 level	Pixel matrix per panel	128x128 pixels
Colors	281 Trillion	Input voltage (AC)	110 ~ 240 V
Ingress protection (Front / Rear)	IP40/IP21	Operating temperature	-10 ~ +40°C
Viewing angle (H/V)	140/140 deg.	Signal input format (with video processor)	AV, S-Video, VGA, DVI, HDMI, SDI, DP

A3pro	Panel	Ratio	Panel QTY.	Size (m²)	Dimension (WxH)m	Pixel resolution	Total weight (kg)	Power (Max. Watts)
4:3	4x3	4:3	12	3	2x1.5	512x384	120	1620
	8x6	4:3	48	12	4x3	1024x768	480	6480
	12x9	4:3	108	27	6x4.5	1536x1152	1080	14580
	16x12	4:3	192	48	8x6	2048x1536	1920	25920
16:9	5x3	16:9.6	15	3.75	2.5x1.5	640x384	150	2025
	7x4	16:9.1	28	7	3.5x2	896x512	280	3780
	9x5	16:8.9	45	11.25	4.5x2.5	1152x640	450	6075
	10x6	16:9.6	60	15	5x3	1280x768	600	8100
	12x7	16:9.3	84	21	6x3.5	1536x896	840	11340
	14x8	16:9.1	112	28	7x4	1792x1024	1120	15120
	15x8	16:8.5	120	30	7.5x4	1920x1024	1200	16200
	16x9	16:9	144	36	8x4.5	2048x1536	1440	19440

Shenzhen Abase Optoelectronic Co., Ltd. reserves the right to modify product design, specifications, and parameters without further notice. Photos are used for illustration purpose only as products may differ from these photos. All rights reserved by Shenzhen Abase Optoelectronic Co., Ltd.